


MODEL
W/O LEVER
WITH LEVER

METAL
SV-WB9A
SV-WB9L

Double Female Screwed. (Inlet / Outlet)

When placing order, please indicate **Working Pressure**.

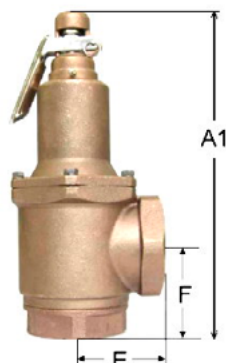

Working Fluid	Non-Corrosive Gas, Air, Steam
Working Temperature	-45°C ~ 185°C
Working Pressure	0.3 ~ 10.5 kgf/cm ² , (1~12 Bar)
Connection	BSPT (BS21), NPT (ANSI B2.1)

Material

No. / Parts	W/O Lever	SV-WB9A	SV-WB9L
	Disc Type	METAL TO METAL	METAL TO METAL
1	Valve Body	CAST BRONZE	CAST BRONZE
2	Valve Seat	CAST BRONZE	CAST BRONZE
3	Valve Disc	FORGED BRASS	FORGED BRASS
4	Spring	STEEL	STEEL
5	Stem	BRASS	BRASS
6	Handle (WB9L)	—	STEEL

Dimension Type Sealing (W/O Lever)

Nominal Diameter	WB9A	Inlet	Outlet	Valve Seat Orifice			Lift ℓ	Wt. kgs
	A	B	C	D	E	F		
2.1/2" x 3"	323	2.1/2"	3"	75	92.5	90	2	12.00
3" x 3"	323	3"	3"	75	92.5	90	2	12.00

Type Lever

Nominal Diameter	WB9L	Wt. kgs
	A1	
2.1/2" x 3"	345	12.00
3" x 3"	345	12.00